



Non spring return plant valve actuators

VA-7150


Floating and proportional control

The VA-7150 series synchronous motor driven actuator provides floating or proportional control of valves with up to 19 mm stroke in heating, ventilation and air conditioning applications.

This compact, non-spring return actuator has 500 N nominal thrust and responds to a variety of input signals. The VA-7150 series can be easily installed on site or ordered pre-fitted to VG7000, VGS800 and VG9000 flanged valve series in accordance with the specified maximum close-off pressure ratings.

Features

- ▶ 500 N force output in a compact unit
- ▶ Magnetic clutch
- ▶ Unique Yoke design
- ▶ Coupler for simple actuator attachment to flanged valves
- ▶ Positioner with adjustable starting point and span, reverse and direct action modes
- ▶ "Signal fail" safe position

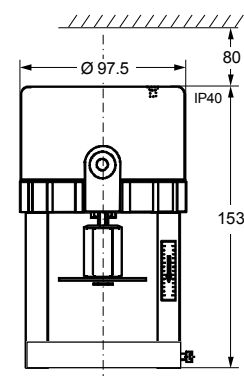

Dimensions in mm

Ordering information

Codes	Supply voltage (50/60 Hz)	Action control	Protection class	Coupler type
VA-7150-1001	24 VAC	Floating	IP40	Threaded
VA-7150-1003	230 VAC			Slotted
VA-7150-8201	24 VAC			Threaded
VA-7150-8203	230 VAC			Slotted
VA-7152-1001	24 VAC	Proportional 0...10 V		Threaded
VA-7152-8201				Slotted